

MAGNET LATCHING VALVES



Series 15 >> Model 152

2-Way Normally Closed Valve

The little black box – magnetic components encased in epoxy for durability and reliability. Interior parts are stainless steel and anodized aluminum. The valves may be used with air, inert gas and liquid media at pressures from vacuum to 500 psi – depending upon orifice size and configuration. For those who require extra heat resistance and media compatibility, FKM and other elastomers are available.

- **Small, lightweight and economical.**
- **Operating pressures from vacuum to 500 psi.**
- **Quality design and construction.**

OPERATING CONDITIONS

Media: Air, water, and other fluids compatible with standard Buna seals. Hot water, steam, gasoline, and many oils require special seal materials. (Series 15 pressure ratings may change due to the viscosity of the liquid.)*

Valve Temperature Range: Standard Valves - 0°F (-18°C) to 104°F (40°C) ambient; 0°F (-18°C) to 150°F (65°C) media. Optional Valves - can tolerate much higher or much lower ambient and media temperatures.*

Maximum Operating Pressure Differentials: See table on proceeding page.

Burst Pressure: 5,000 PSI

Leakage: Bubble tight for standard valves.

Vacuum: To 5 Microns*

ELECTRICAL CHARACTERISTICS

Coil Voltage: 3.0 to 180V DC

Nominal Power: DC – 10.5 Watts

Coil Construction: Molded Class F. (155 C°)

Typical Response Time on Air: Approximate 30 milliseconds pulse to energize and de-energize.

Operating Speed: Up to 600 CPM

MECHANICAL CHARACTERISTICS

Body: Anodized Aluminum (Std.)

Internal Components: Stainless Steel

Elastomers: Nitrile (Buna) (Std.). Many other elastomers available.*

Orifice Diameter: See table on proceeding page.

Porting: 1/8" NPT (Std.)

Housing: Leadwires and DIN Style Connector.

Listings: Most valves are UL and CSA listed.*



Life Expectancy: Millions of cycles, depending on application, lubrication, etc.


Valve Weight: 0.27 lb to 0.30 lb depending on model and housing style.

Repair Packs: See table on proceeding page.


Options: Round Brass or Stainless Steel Body, Stackable Construction and Alternate Elastomers.

* Consult representative or factory for options and specifications.

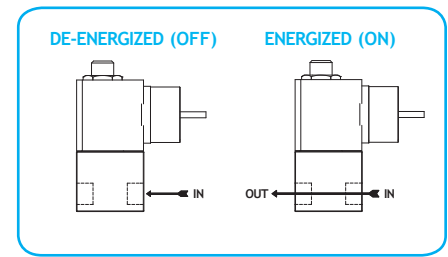

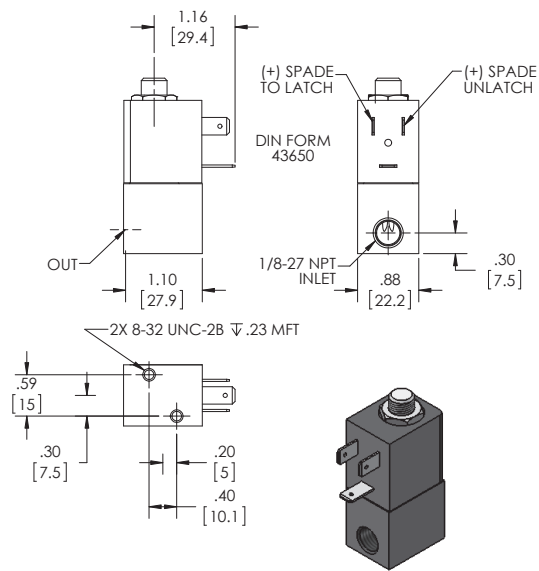

**SERIES 15
MODEL 152
2WNC
MAGNETIC LATCHING STYLE COIL**

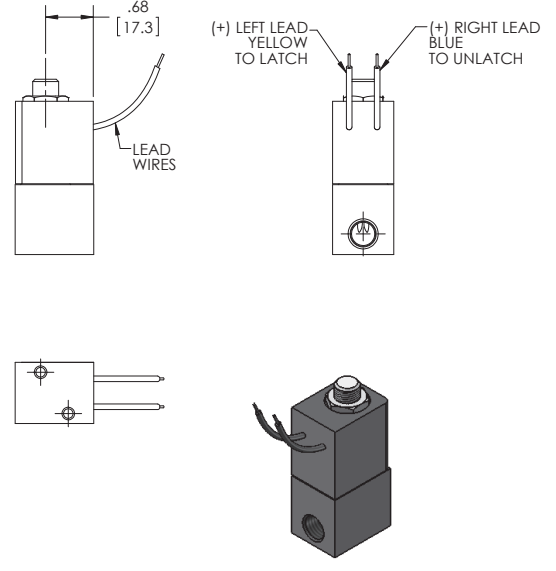

**SERIES 15
MODEL 152
2WNC
MAGNETIC LATCHING COIL WITH LEADS**

VALVE SPECIFICATIONS

MAX. OPER. PRESS. DIFF.	ORIFICE SIZE	CV FACTOR	VALVE NUMBER	
			LEAD WIRE	DIN STYLE
500	1/32	.022	152G2DGLM	152G2DELM
250	3/64	.055	152H2DGLM	152H2DELM
160	1/16	.075	152J2DGLM	152J2DELM
75	3/32	.130	152K2DGLM	152K2DELM
50	1/8	.230	152N2DGLM	152N2DELM

WHEN ORDERING VALVES OR REPAIR PACKS ADD VOLTAGE AND FREQUENCY TO COMPLETE VALVE NUMBER. EXAMPLES: VALVE (152J2DGLM-12/DC) REPAIR PACK (K152JDLM)